



# White Stain Block Primer

## BUILDING PRODUCTS COATINGS A68W0142

Exterior primer

High performance acrylic

Superior base for consumer and industrial finish topcoats

- Coatings VOC
  - .78 lbs/gal
  - 94.0 g/l
- Material VOC
  - .35 lbs/gal
  - 42 g/l
- Solids by Weight- 59.3%
- Solids by Volume- 39.7%
- Flashpoint - > 200F
- pH – 9.0-10.0
- Viscosity @ 75 F 14-16# Sig Zahn #2
- Weight per Gallon – 12.3
- Average Coverage – 636 sq. ft/gal

### RPM Wood Finishes OEM technology:

- Low cost primer made to achieve excellent priming results
- Satin finish will accept most oil and water based top coats
- Fast dry
- Low VOC, water based formulation
- Durable exterior primer for all wood products

Formulas designed for vacuum coating, spray, roll coat processes

Storage – keep from freezing. Store away from oxidizers and caustics

Wood products must be clean and dry before applying White Stain Block Primer

As with any coating, spray tip size, gun location, pump pressure and line speed can affect mil thickness

### Packaging:

Pails/Drums/Totes



# White Stain Block Primer

## BUILDING PRODUCTS COATINGS A68W0142

This product is supplied ready to use. If reduction is required to meet specific application requirements, add tap water slowly to minimize foam generation

Mix thoroughly prior to use with mechanical agitation

Keep containers tightly covered to limit evaporation and prevent skinning

Dry times based on application and heat and air movement which will reduce these times considerably.


Consult with out technical staff to optimize your process.

Clean up is best accomplished with soap and water.


**Safe Storage and Handling:** Store in a cool, dry place. Close all containers after use. Do not store near heat or sparks. Spills should be cleaned up with non-sparking tools.

**See the product MSDS for complete safety information.**

**Innovation – Quality – Product – Service**

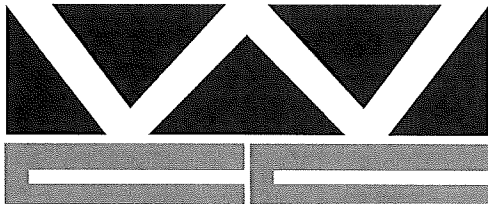

Westfield Coatings  
Corporation  
221 Union Street  
Westfield, MA 01086

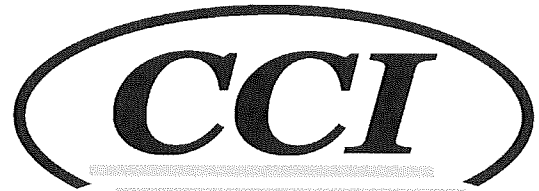

Chemical Coatings Inc.  
Chemical Coatings, Inc.  
22 South Center Street  
Hickory, NC 28603

Values shown are calculated values, and are accurate to the best of our ability. They should not be taken as product specifications. We cannot anticipate all conditions where our products may be used, and therefore cannot offer any warranties. Mixing our materials with any materials other than our recommended materials will change the characteristics of the coating and may very well detract from the initial properties. We also cannot predict system properties if other manufacturers products are used in conjunction with ours.