



White W/B Vacucoat Primer

BUILDING PRODUCTS COATINGS 7-6SP16382

Directions for Use

This product is supplied ready to use. If reduction is required to meet specific application requirements, add tap water slowly to minimize foam generation

Mix thoroughly prior to use with mechanical agitation

Keep containers tightly covered to limit evaporation and prevent skinning.

Dry times are base on application methods

Consult with our technical staff to optimize your process.

Clean up is best accomplished with soap and water.


Special Notes

Safe Storage and Handling: Store in a cool, dry place. Close all containers after use. Do not store near heat or sparks. Spills should be cleaned up with non-sparking tools.

See the product MSDS for complete safety information.

MANUFACTURED BY:

Innovation – Quality – Product – Service

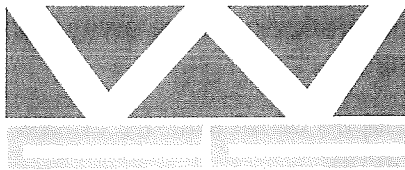

Westfield Coatings Corporation
221 Union Street
Westfield, MA 01086



Chemical Coatings Inc.
Chemical Coatings, Inc.
22 South Center Street
Hickory, NC 28603

Values shown are calculated values, and are accurate to the best of our ability. They should not be taken as product specifications. We cannot anticipate all conditions where our products may be used, and therefore cannot offer any warranties. Mixing our materials with any materials other than our recommended materials will change the characteristics of the coating and may very well detract from the initial properties. We also cannot predict system properties if other manufacturers products are used in conjunction with ours.



BUILDING PRODUCTS COATINGS

White W/B Vacucoat Primer

7-6SP16382

Product Description

INTERIOR PRIMER

Made from a blend of vinyl acetate and acrylic resin.

Superior finish for all interior applications

Superior base for consumer and industrial finish topcoats

Product Advantages

Formulation combines Zinsser's 150 years of primer experience with the Wood Finishes Group OEM wood technology:

- Durable primer for all wood products
- Specifically made to achieve excellent priming results. High hiding coating provides easy top coating
- Designed to provide superior moisture resistance and water based top coats..
- Fast dry, provides non-blocking properties for stacking
- Low VOC, water based formulation

Physical Properties

- Coatings VOC
 - 1.2 lbs/gal
 - 141.9 g/l
- Material VOC
 - .5 lbs/gal
 - 56.4 g/l
- Solids by Weight-56.3 %
- Solids by Volume-33.0%
- Flashpoint - > 200F
- pH – 8.5
- Viscosity @ 75 F –17-18 secs #4 Ford
- Weight per Gallon – 12.61 lbs/gal
- Average Coverage – 529 sq. ft/gal

Product Information

Designed for vacuum coating, spray, and roll coat processes.

Storage – keep from freezing. Store away from oxidizers and caustics

Wood products must be clean and dry before applying exterior primer

As with any coating, spray tip size, gun location, pump pressure and line speed can affect mil thickness

Will accept most oil and water based topcoats

Packaging:

Pails/Drums/Totes